

# M2



## MONOBLOC



Reversible



Timer



Remote control included



Filters



Dehumidifier

**ELEGANT AND EFFICIENT, M2 WILL SUIT EVERY NEED!**

## PRODUCT BENEFITS

### QUICK & EASY SETUP

Thanks to its design, M2 does not require the service of a specialized technician with F-Gaz certification. M2 can be easily installed from inside the room that needs to be air conditioned. Installation time is less than an hour. Startup of the heat pump is immediate.

### NO OUTDOOR UNIT

M2 offers an innovative and highly effective system without outdoor unit. Depending on the country, strict urban planning laws prohibit the installation of external units on building facades. It preserves the aesthetic appearance of buildings thanks to their two discreet ventilation grids.

### OPTIMIZED CAPACITY & PERFORMANCE

With its aesthetic design, M2 is a reversible air conditioner with a power of 2,730W in heating mode and 2,630W in cooling mode. M2 generates less electricity consumption (Classification A) and less noise pollution.

### EFFICIENT FILTRATION

M2 is equipped with a dust filter as well as an activated charcoal filter.

### REMOTE CONTROL INCLUDED

M2 has an infrared remote control.




Ideal for replacing or reinforcing traditional heating depending on the season.




# M2


Mobika reference		EL-CL-015
Nominal capacity (W)	Cooling mode	2 630
	Heating mode	2 730
Booster resistance (W)		-
Performance	EER / COP	2,67 / 3,1
Nominal absorbed power (W)	Cooling mode	981
	Heating mode	880
Nominal absorbed current (A)	Cooling mode	4,3
	Heating mode	3,8
Energy class		A
Recommended surface area (m <sup>2</sup> )		12 - 20
Indoor working temperature range (C°)		+18 ~ +30
Outdoor working temperature range (C°)	Cooling mode	+18 ~ +43
	Heating mode	-7 ~ +30
Power supply (V/Ph/ Hz)		230 / 1 / 50
Air flow (m <sup>3</sup> /h)	Indoor	410 / 370 / 320 (HIGH / MIDDLE / Low)
	Outdoor	450 (HIGH / Low)
Deshumidification capacity (L/h)		0,68
Power level (dBA)	Indoor	44 / 46 / 48
	Outdoor	55
Refrigerant type		R32
Refrigerant charge (g)		460
Global Warming Potential (GWP)		2 088
Drill holes for air exchange ducts and condensate drains (Ø mm)		2 x 162 / 1 x 30
Height-adjustable feet (mm)		100 - 120
Product : Width x Height x Depth (mm)		1 000 x 580 x 230
Packaging : Width x Height x Depth (mm)		1 153 x 660 x 345
Net weight / Gross weight (kg)		45 / 52

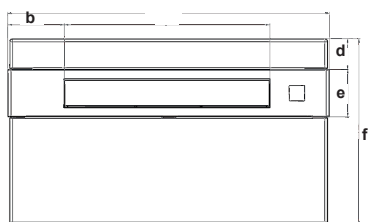

Dimensions (mm)					
a	b	c	d	e	f
1 000	178	645,6	96,2	148,6	580



Dimensions (mm)		
a	b	c
230	57,4	527,8



Dimensions (mm)				
a	b	c	d	e
254,2	340	170	133,5	128,5

- Included accessories :
- 1 remote control holder
  - 1 remote control + 2 batteries
  - 1 wall bracket
  - 1 condensate pipe

- 2 exterior grids
- 2 universal PVC sheets
- 1 installation template
- 1 user manual
- 2 feet

For more content scan the QR Code !

